



RDM 2.0

Remote display module for all-in-one generator control & paralleling unit

The **RDM 2.0** works as a remote display and, combined with the **GENSYS 2.0 CORE**, can control a single or a multiple generating sets power plant. Connected to a **GENSYS 2.0**, a **GENSY 2.0 LT** or a **MASTER 2.0**, the **RDM 2.0** can be used as an additional remote display. **RDM 2.0** screen displays the same data as the **GENSYS 2.0**. The display shows engine and electrical parameters for intuitive operation.

ADVANTAGES

- Same multi-function graphic display than the **GENSYS 2.0**.
- Same front panel than the **GENSYS 2.0**.



SWITCHBOARD MOUNTED VERSION WITH DISPLAY



Part numbers:

A53Y0 RDM 2.0 Switchboard mounted version with display

KEY FEATURES

► INFORMATION DISPLAY

- Engine parameters display: oil pressure, water temp, speed, hours run meter...
- Generator electrical parameters display:
 - Phase-phase Voltage (3 phase RMS), phase-neutral Voltage (3 phase RMS)
 - Current (3 phase RMS), frequency.
 - Active power (3 phase RMS + total) and reactive power (3 phase RMS + total)
 - Power factor (3 phase RMS + total)
 - Active power energy (kWh) and reactive power energy (kVArh)
- Mains electrical parameters display:
 - Phase-phase Voltage (3 phase RMS) current (3 phase RMS), frequency, active and reactive power, power factor, import active power energy (kWh) and import reactive power energy (kVArh)

► POWER SUPPLY

- DC voltage power supply input: 8 to 40V_{DC}, 600mA at 12V_{DC} and 300mA at 24V_{DC}
- Standard languages: English, Spanish, French, Italian. Other custom languages are downloadable on request

► COMMUNICATION PORTS

- Ethernet for connected module and embedded website, 4 digital inputs and 4 digital outputs.
- Maximum distance bewteen a module and a **RDM 2.0**: 100 meters (NB. This lengh can be longer if a hub or a swith is used)

► ENVIRONMENT

- Operating temperature: -20 to +70°C
- Storage temperature: -30 to +80°C
- Humidity: 5 to 95%. Tropic-proof circuits for normal operation in humid conditions.
- Front panel: IP64 protection.
- Rear panel: IP20 protection.

► SIZE AND WEIGHT

- Size: 248x197x57mm (9.76x7.76x2.24in)
- Panel cut out: 177x228mm (6.97x8.98in)
- Weight: 0.9kg (2lb)


► DIRECTIVES

- European Union Directives: EN 50081-2, EN 50082-2, 73/23EEC




POWER PLANT CONFIGURATIONS

➤ STANDARD CONFIGURATION

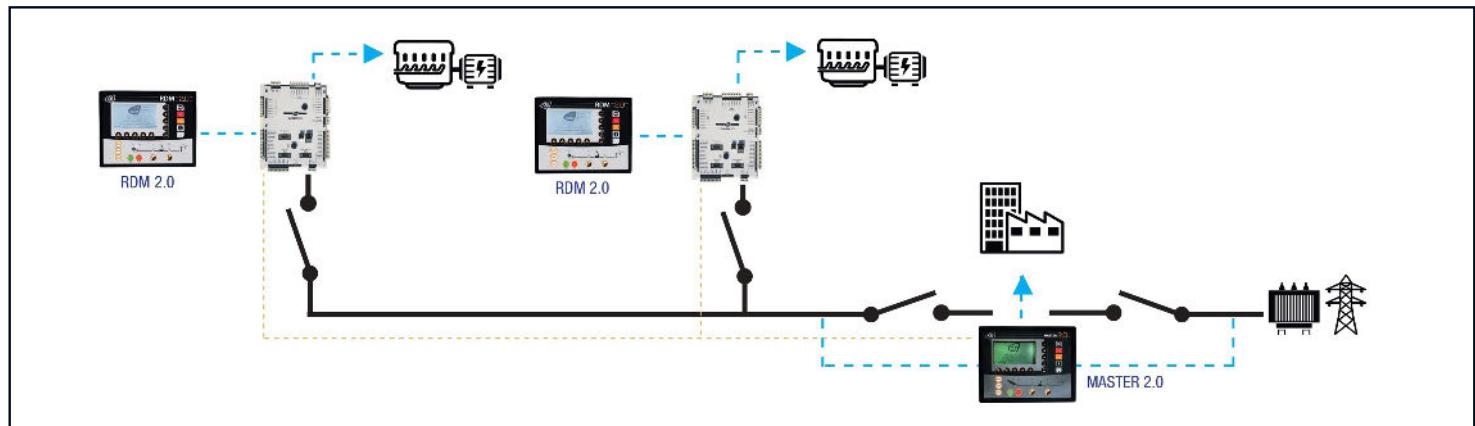

➤ REMOTE DISPLAY CONFIGURATION

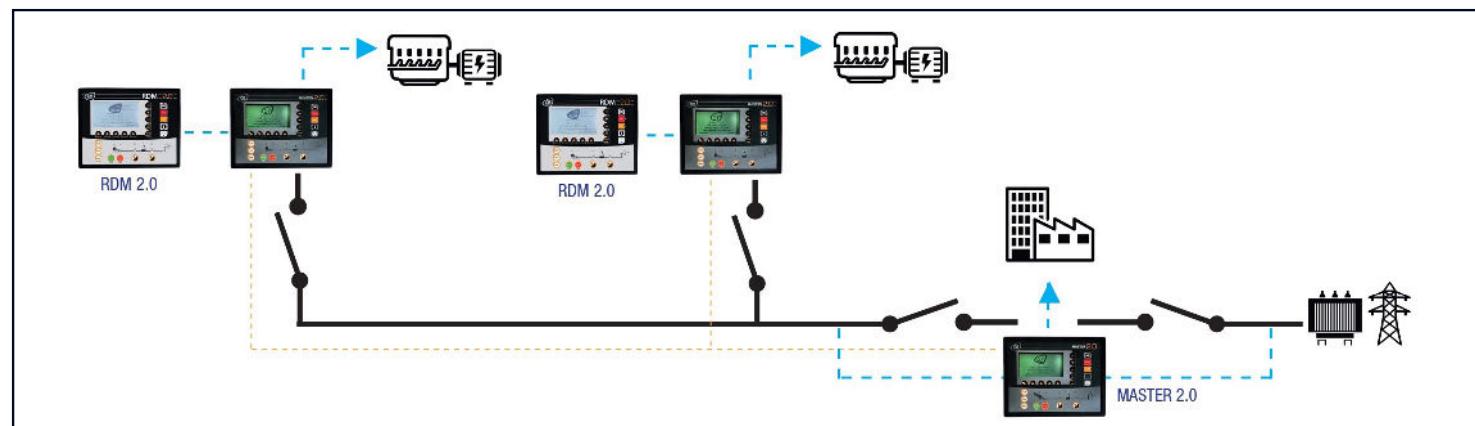

➤ MULTI CONTROL HMI

